


Power Range

0612201701

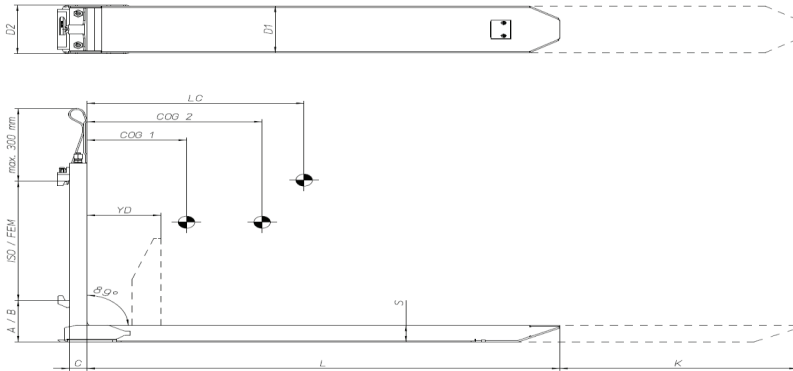

Metric

Model	Capacity Kg. / 600 (mm)	Section D1/D2 x S (mm)	Length (mm) / Stroke (mm)	Lost Load Thickness (mm)	CoG1 (mm) +/-	CoG2 (mm) +/-	Weight (kg) +/-	ISO/FEM
RE4 25 1100/0750 RE4 25 1200/0850 RE4 25 1350/1000	2500 kg.	161/169 x 57	1100/0750 1200/0850 1350/1000	45	370 414 482	526 596 702	185 197 215	2A
RE4 35 1100/0750 RE4 35 1200/0850 RE4 35 1350/1000	3500 kg.	161/169 x 57	1100/0750 1200/0850 1350/1000	45	350 394 460	498 566 670	196 208 227	3A
RE4 45 1100/0750 RE4 45 1200/0850 RE4 45 1350/1000	4500 kg.	161/169 x 57	1100/0750 1200/0850 1350/1000	45	350 394 460	498 566 670	196 208 227	3A
RE4 58 1100/0750 RE4 58 1200/0850 RE4 58 1350/1000	5800 kg.	161/169 x 62	1100/0750 1200/0850 1350/1000	50	318 359 421	455 519 618	238 250 270	4A
RE4 32 1100/0750 RE4 32 1200/0850 RE4 32 1350/1000	3200 kg.	161/169 x 47	1100/0750 1200/0850 1350/1000	45	318 359 421	455 519 618	238 250 270	3A

Imperial

Model	Capacity on 24" (lbs)	Section D1/D2 x S (Inch)	Length / Stroke	Lost Load Thickness (Inch)	CoG1 (Inch) +/-	CoG2 (Inch) +/-	Weight (lbs) +/-	ISO/FEM
RE4 25 1100/0750 RE4 25 1200/0850 RE4 25 1350/1000	5,500	6.33"/6.65" x 2.2"	43.3"/29.5" 47.2"/33.4" 53.1"/39.3"	1.7"	14.6" 16.3" 19.0"	20.7" 23.5" 27.6"	407 433 473	2A
RE4 35 1100/0750 RE4 35 1200/0850 RE4 35 1350/1000	7,700	6.33"/6.65" x 2.2"	43.3"/29.5" 47.2"/33.4" 53.1"/39.3"	1.7"	13.8" 15.5" 18.1"	19.6" 22.3" 26.4"	431 458 499	3A
RE4 45 1100/0750 RE4 45 1200/0850 RE4 45 1350/1000	9,900	6.33"/6.65" x 2.2"	43.3"/29.5" 47.2"/33.4" 53.1"/39.3"	1.7"	13.8" 15.5" 18.1"	19.6" 22.3" 26.4"	431 458 499	3A
RE4 58 1100/0750 RE4 58 1200/0850 RE4 58 1350/1000	12,760	6.33"/6.65" x 2.4"	43.3"/29.5" 47.2"/33.4" 53.1"/39.3"	1.9"	12.5" 14.1" 16.6"	17.9" 20.4" 24.3"	524 550 594	4A
RE4 32 1100/0750 RE4 32 1200/0850 RE4 32 1350/1000	7,040	6.33"/6.65" x 1.9"	43.3"/29.5" 47.2"/33.4" 53.1"/39.3"	1.7"	12.5" 14.1" 16.6"	17.9" 20.4" 24.3"	524 550 594	3A