


MANUAL KOOI-REACHFORKS®

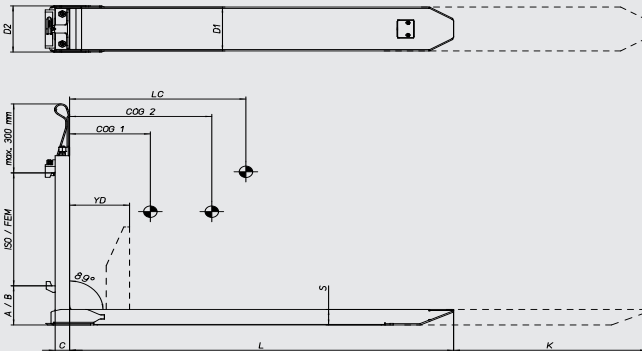

Manual KOOI-REACHFORKS®

Ideal for companies with less frequent need for variable fork length.

- Damages of oversized forks will be history!
- Improving handling speed by lifting two pallets

Manual KOOI-REACHFORKS® including replaceable wearplate

Model	Capacity on LC 600 mm (kg)	Section D1/D2xS (mm)	L/K (mm)	C (mm)	CoG1 (mm)	CoG2 (mm)	Weight per pair (kg)	ISO/FEM
MME 17 0800/0400	1700	132x41	0800/0400	40	220	245	95	2A
MME 17 0800/0200			0800/0200		220	245	95	
MME 17 1000/0200			1000/0200		295	315	110	
MME 17 1200/0800			1200/0800		380	500	121	
MME 20 0800/0400	2000	132x58	0800/0400	45	235	295	114	2A
MME 20 0800/0200			0800/0200		235	295	114	
MME 20 1000/0200			1000/0200		315	415	131	
MME 20 1200/0800			1200/0800		405	545	150	
MME 20 1400/1000			1400/1000		484	640	161	
MME 24 0800/0200	2400	132x45	0800/0200	45	220	275	104	2A
MME 24 0800/0400			0800/0400		220	275	104	
MME 24 1000/0200			1000/0200		300	325	121	
MME 24 1200/0800			1200/0800		385	515	135	
MME 30 0800/0200	3000	132x58	0800/0200	45	220	275	122	3A
MME 30 0800/0400			0800/0400		220	275	122	
MME 30 1000/0200			1000/0200		300	325	144	
MME 30 1200/0800			1200/0800		390	515	158	
MME 30 1400/1000			1400/1000		470	645	176	
MME 35 0800/0200	3500	132x63	0800/0200	50	230	300	140	3A
MME 35 0800/0400			0800/0400		230	300	140	
MME 35 1000/0200			1000/0200		320	390	160	
MME 35 1200/0800			1200/0800		400	550	183	
MME 35 1400/1000			1400/1000		485	680	205	


Optional:

- Extra adjustments for in-between positions on request. Type MME including replaceable wearplate under innerforks.
- Special added ISO B mounting.

Remark:

- The lift truck manufacturer must determine the combined KOOI-REACHFORKS® and lift truck capacity.
- Capacities shown are nominal and apply to the forks and not the lift truck. Other capacities and dimensions on request.
- In cold-storage applications KOOI-REACHFORKS® can be used down to -30 degrees Celcius, contact your dealer.

MANUAL KOOI-REACHFORKS®

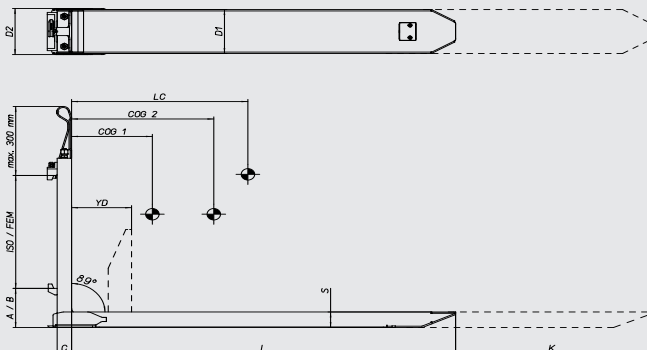

Manual KOOI-REACHFORKS®

Ideal for companies with less frequent need for variable fork length.

- Damages of oversized forks will be history!
- Improving handling speed by lifting two pallets

Manual KOOI-REACHFORKS® including replaceable wearplate								
Model	Capacity on LC 24" (Lbs)	Section D1/D2xS (In)	L/K (In)	C (In)	CoG1 (In)	CoG2 (In)	Weight per pair (Lbs)	ISO/ FEM
MME 17 0800/0400	3.740	5.1x1.6	31.5/47.2	1.6	8.7	9.6	209	2A
MME 17 0800/0200			31.5/39.4		8.7	9.6	209	
MME 17 1000/0200			39.4/47.2		11.6	12.4	242	
MME 17 1200/0800			47.2/78.7		15.0	19.7	266	
MME 20 0800/0400	4.400	5.2x2.3	31.5/47.2	1.8	9.3	11.6	251	2A
MME 20 0800/0200			31.5/39.4		9.3	11.6	251	
MME 20 1000/0200			39.4/47.2		12.4	16.3	288	
MME 20 1200/0800			47.2/78.7		15.9	21.5	330	
MME 20 1400/1000			55.1/94.5		19.1	25.2	354	
MME 24 0800/0200	5.280	5.2x1.8	31.5/39.4	1.8	8.7	10.8	229	2A
MME 24 0800/0400			31.5/47.2		8.7	10.8	229	
MME 24 1000/0200			39.4/47.2		11.8	12.8	266	
MME 24 1200/0800			47.2/78.7		15.2	20.3	297	
MME 30 0800/0200	6.600	5.2x2.3	31.5/39.4	1.8	8.7	10.8	268	3A
MME 30 0800/0400			31.5/47.2		8.7	10.8	268	
MME 30 1000/0200			39.4/47.2		11.8	12.8	317	
MME 30 1200/0800			47.2/78.7		15.4	20.3	348	
MME 30 1400/1000			55.1/94.5		18.5	25.4	387	
MME 35 0800/0200	7.700	5.2x2.5	31.5/39.4	2.0	9.1	11.8	308	3A
MME 35 0800/0400			31.5/47.2		9.1	11.8	308	
MME 35 1000/0200			39.4/47.2		12.6	15.4	352	
MME 35 1200/0800			47.2/78.7		15.7	21.7	403	
MME 35 1400/1000			55.1/94.5		19.1	26.8	451	

Optional:

- Extra adjustments for in-between positions on request. Type MME including replaceable wearplate under innerforks.
- Special added ISO B mounting.

Remark:

- The lift truck manufacturer must determine the combined KOOI-REACHFORKS® and lift truck capacity.
- Capacities shown are nominal and apply to the forks and not the lift truck. Other capacities and dimensions on request.
- In cold-storage applications KOOI-REACHFORKS® can be used down to -13 F°, contact your dealer.