


Rollerized Tine Extenders

0612201701

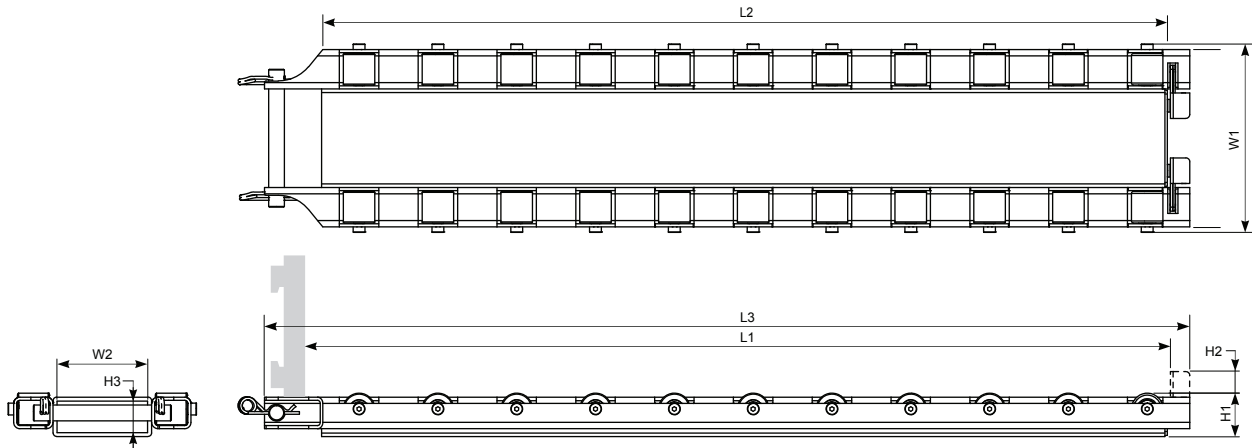

Model	Capacity on LC 600 mm (kg)	W1 (mm)	W2 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	Weight per pair (kg)
RTE 50-1850	5000	400	160	1850	1900	2078	110	65	75	540
RTE 50-2250				2250	2300	2478				608
RTE 50-2450				2450	2500	2678				642
RTE 50-2750				2750	2800	2978				696
RTE 50-3150				3150	3200	3378				764
RTE 80-1850	8000	480	230	1850	1900	2078	110	65	80	562
RTE 80-2250				2250	2300	2478				630
RTE 80-2450				2450	2500	2678				664
RTE 80-2750				2750	2800	2978				718
RTE 80-3150				3150	3200	3378				786


Options

Rubber bump stopper



Rollerized Tine Extenders

0612201701

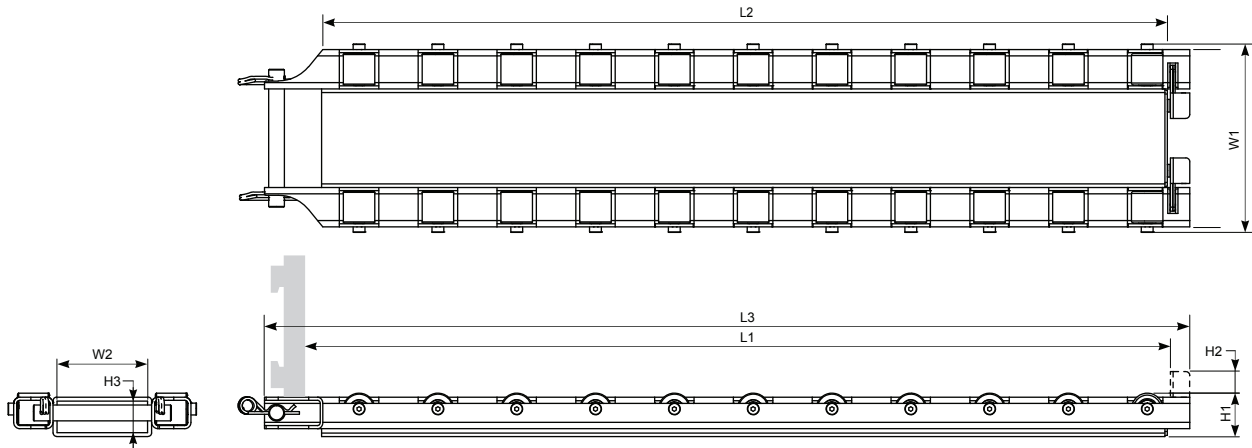

Model	Capacity on LC 24" (Lbs)	W1 (in)	W2 (in)	L1 (in)	L2 (in)	L3 (in)	H1 (in)	H2 (in)	H3 (in)	Mass per pair (Lbs)
RTE 50-1850	11,000	15.7	6.3	72.8	74.8	81.8	4.3	2.6	3.1	1190
RTE 50-2250				88.6	90.6	97.6				1340
RTE 50-2450				96.5	98.4	105.4				1415
RTE 50-2750				108.3	110.2	117.2				1534
RTE 50-3150				124.0	126.0	133.0				1684
RTE 80-1850	17,600	18.9	9.1	72.8	74.8	81.8	4.3	2.6	3.1	1239
RTE 80-2250				88.6	90.6	97.6				1389
RTE 80-2450				96.5	98.4	105.4				1464
RTE 80-2750				108.3	110.2	117.2				1583
RTE 80-3150				124.0	126.0	133.0				1733

Options

Rubber bump stopper

