


# Stationary Pull Installation

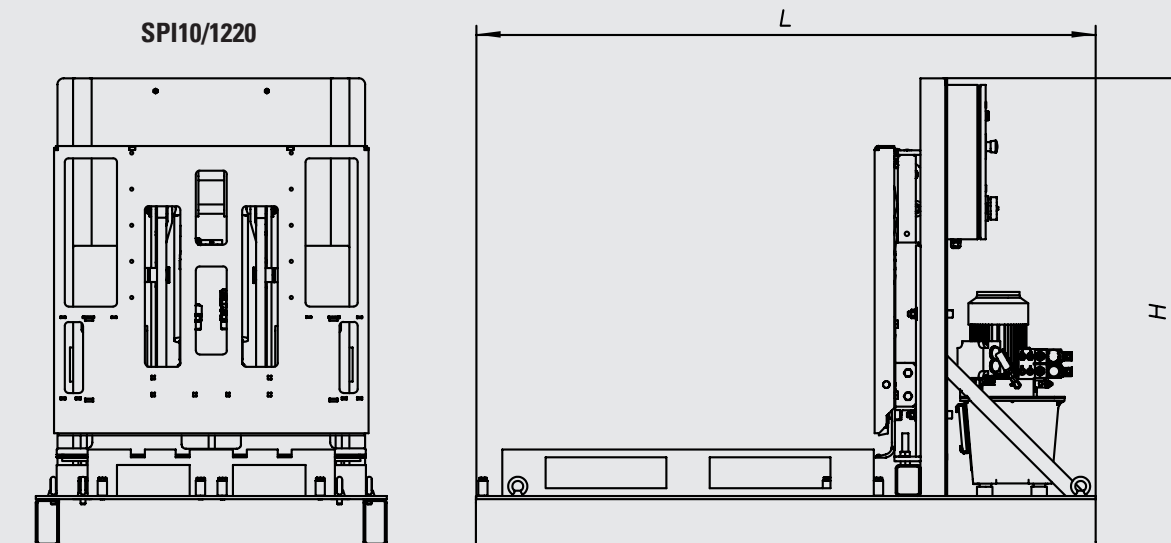

## METRIC

Model	Loading Capacity (kg)	L (mm)	H (mm)	Width (mm)	Power Supply	Weight (kg)	Safety Circuit
SPI10/1220	1000	2000	1515	1305	3ph/400V/16A/50Hz or 3ph/208V/16A/60Hz	790	CAT3/PLd


### Standard

- Two sided safety light curtain

### Optional

- Three sided safety fence
- Galvanized or stainless steel construction parts
- Warning buzzer and warning beacon light
- Oil level and temperature warning
- Other voltages, amperes and capacities on request

# Stationary Pull Installation

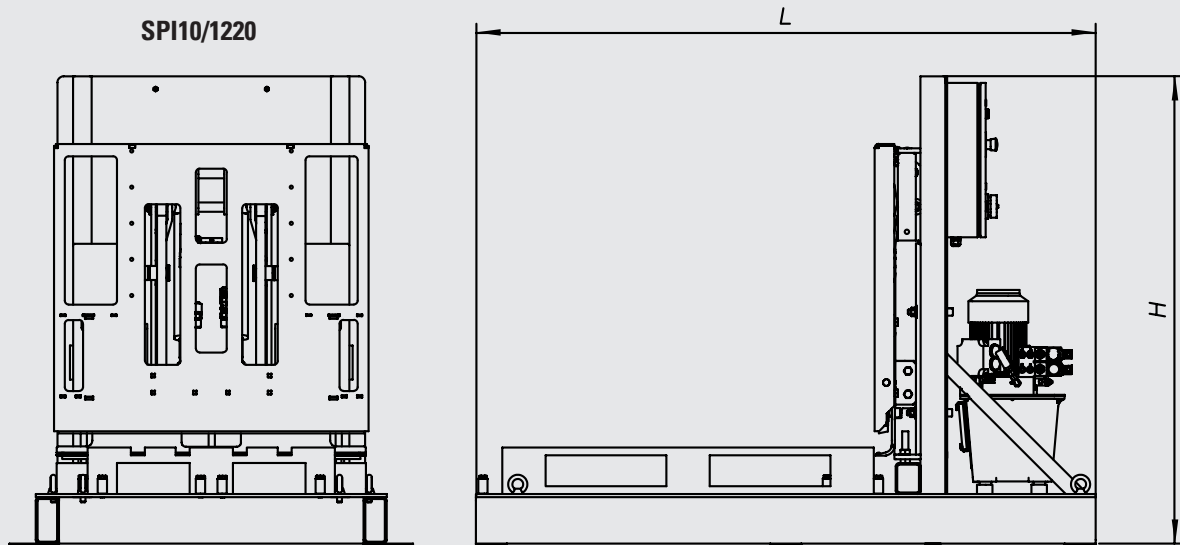

## IMPERIAL

Model	Loading Capacity (lbs)	L (inch)	H (inch)	Width (inch)	Power Supply	Weight (lbs)	Safety Circuit
SPI10/1220	2200	78,74	59,65	51,38	3ph/400V/16A/50Hz or 3ph/208V/16A/60Hz	1741	CAT3/PLd

### Standard

- Two sided safety light curtain

### Optional

- Three sided safety fence
- Galvanized or stainless steel construction parts
- Warning buzzer and warning beacon light
- Oil level and temperature warning
- Other voltages, amperes and capacities on request