


SINGLE HEIGHT SHIFT

0612201901

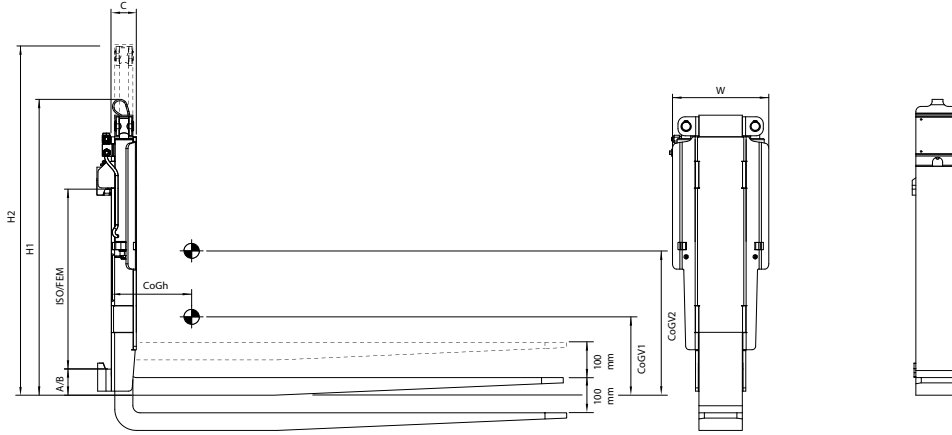

Model	Capacity on LC 600 mm (kg)	Vertical movement up/down (mm)	Fork section WxSxL (mm)	W (mm)	H1 (mm)	C (mm)	CoGh (mm)	CoGv1 (mm)	CoGv2 (mm)	ISO/FEM	Weight (kg)
SHSSL 35.12-120/45	3500	100 / 100	120x45x1200	270	1025	69	240	275	360	3B	195
SHSSL 45.12-120/50	4500	100 / 100	120x50x1200	270	1025	69	255	265	355	3B	210
SHSSL 58.12-150/50	5800	100 / 100	150x50x1200	280	1025	69	250	260	350	3B	255
SHSSL 65.12-130/60	6500	100 / 100	130x60x1200	300	1200	79	285	250	345	4B	265
SHSSL 77.12-200/50	7700	100 / 100	200x50x1200	350	1200	69	235	330	420	4B	375
SHSSL 80.12-150/60	8000	100 / 100	150x60x1200	300	1200	79	225	340	425	4B	335

- Maximum capacity 7700 kg on LC 600 mm. All other capacities on request.
- Including standard lift truck forks. Also possible in combination with KOOI-REACHFORKS®.

Model	Capacity on LC 24" (Lbs)	Vertical movement up/down (in)	Fork section WxSxL (in)	W (in)	H1 (in)	C (in)	CoGh (in)	CoGv1 (in)	CoGv2 (in)	ISO/FEM	Weight (Lbs)
SHSSL 35.12-120/45	7,700	3.9/ 3.9	4.7x1.8x47.2	10.6	40.4	2.7	9.4	10.8	14.2	3B	429
SHSSL 45.12-120/50	9,900	3.9/ 3.9	4.7x2.0x47.2	10.6	40.4	2.7	10.0	10.4	14.0	3B	462
SHSSL 58.12-150/50	12,760	3.9/ 3.9	5.9x2.0x47.2	11.0	40.4	2.7	9.8	10.2	13.8	3B	561
SHSSL 65.12-130/60	14,300	3.9/ 3.9	5.1x2.4x47.2	11.8	47.2	3.1	11.2	9.8	13.6	4B	583
SHSSL 77.12-200/50	16,940	3.9/ 3.9	7.9x2.0x47.2	11.8	47.2	2.7	9.3	13.0	16.5	4B	825
SHSSL 80.12-150/60	17,600	3.9/ 3.9	5.9x2.3x47.2	11.8	47.2	3.1	8.9	13.4	16.7	4B	737

- Maximum capacity 17,600 Lbs on LC 24". All other capacities on request.
- Including standard lift truck forks. Also possible in combination with KOOI-REACHFORKS®.