


Stationary Pull Installation

MAIN SPECIFICATIONS

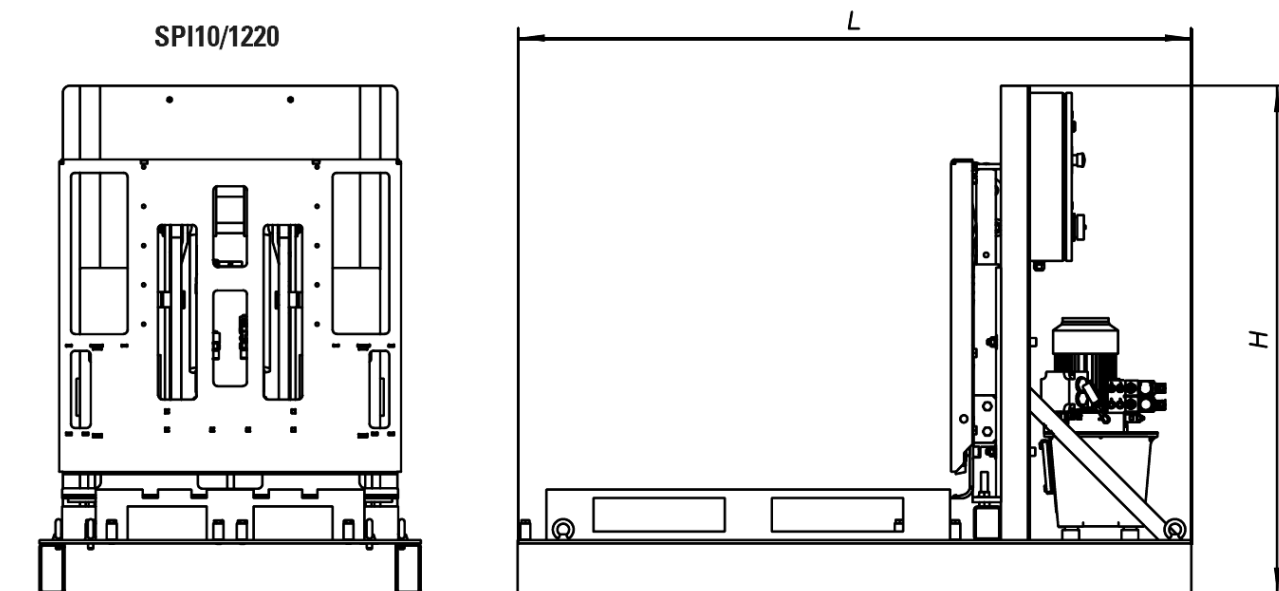

Model	Loading Capacity (kg)	L (mm)	H (mm)	Width (mm)	Power Supply	Weight (kg)	Safety Circuit
SPI10/1220	1000	2000	1515	1305	3ph/400V/16A/50Hz or 3ph/208V/16A/60Hz	790	CAT3/PLd

Standard

- Two sided safety light curtain

Optional

- Three sided safety fence
- Galvanized or stainless steel construction parts
- Warning buzzer and warning beacon light
- Oil level and temperature warning
- Other voltages, amperes and capacities on request