


Rollerized Tine Extenders

# MAIN SPECIFICATIONS

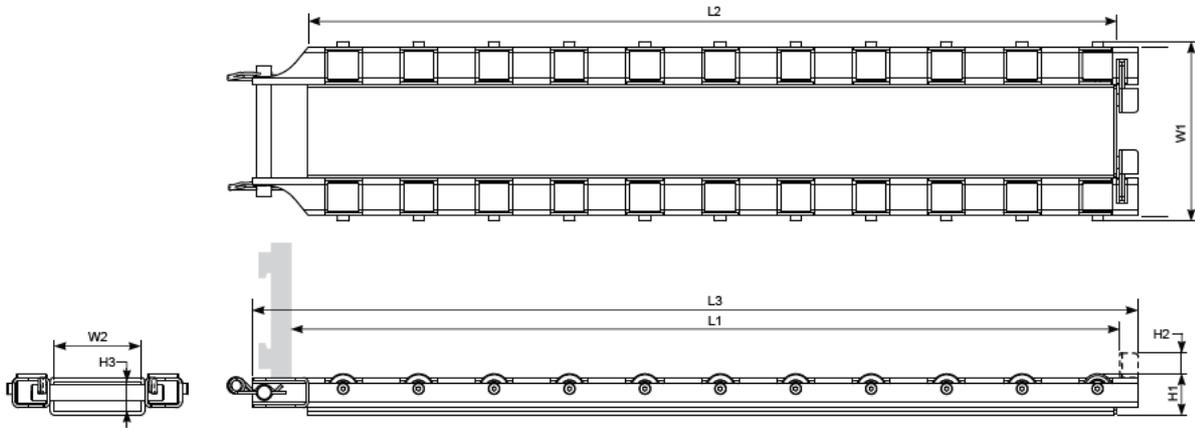

Model	Capacity (kg) LC 600 mm	Overall Width W2 ± mm	Insert Fork Pockets ± mm W2xH3	Effective Length L1 ± mm	Overall Length L3 ± mm	Overall Thickness H1 ± mm	Height Palletstops ± mm H2	Recommended Forklift Forks ± mm	Own Weight per set ± kg
RTE50-1850	5000	410	165x85	1850	2200	110	60	1110-1850	353
RTE50-1850		440	195x85	1850	2200			1110-1850	361
RTE50-2250		410	165x85	2250	2600			1350-2250	423
RTE50-2250		440	195x85	2250	2600			1350-2250	437
RTE50-2450		410	165x85	2450	2800			1470-2450	456
RTE50-2450		440	195x85	2450	2800			1470-2450	475
RTE50-2750		410	165x85	2750	3100			1650-2750	505
RTE50-2750		440	195x85	2750	3100			1650-2750	533
RTE80-1850	8000	480	235x85	1850	2200	110	60	1110-1850	398
RTE80-1850		480	235x110	1850	2225	136		1110-1850	418
RTE80-2250		480	235x85	2250	2600	110		1350-2250	464
RTE80-2250		480	235x110	2250	2625	136		1350-2250	484
RTE80-2450		480	235x85	2450	2800	110		1470-2450	498
RTE80-2450		480	235x110	2450	2825	136		1470-2450	518
RTE80-2750		480	235x85	2750	3100	110		1650-2750	558
RTE80-2750		480	235x110	2750	3125	136		1650-2750	578

**Optional:**

- FOD Locking (Foreign Object Debris)
- Rubber bumper

**Standard colours:**

- RAL 1003
- RAL 5002
- RAL 7021
- RAL 9005

**Remark:**

- Please note that for safety reasons, the standard forklift forks must adequately support the Rollerized Tines Spreaders as indicated in the drawing.

